

**Double**  
**CHARGED**  
VITRIFIED TILES

600 x 600 MM

---

800 x 800 MM



**“ Inspired By The Finest  
And  
Most Modern Trends”**



Elevate your space with our 600x600mm double charge tiles, seamlessly combining exciting designs and enduring durability. Perfect even for high-traffic areas or any place, these tiles offer timeless elegance, ensuring your interiors stay stylish and resilient for years to come.

# Index



Tap To  
Explore  
360 view

Tap On Particular Product To  
Explore Full Size View.



Tap To  
Back To  
Index Page

Again Tap On The Tiles Page  
To Return To Index Page

## DOUBLE CHARGE



POLO  
WHITE




POLO  
CREMA



POLO  
THAR



POLO  
SMOKE



SUPER  
WHITE



ORIO  
WHITE



ORIO  
GREY



MATRIX  
WHITE



MATRIX  
GOLD



MATRIX  
PINK



MATRIX  
PISTA



MATRIX  
CORE



MATRIX  
DOVE



MATRIX  
YELLOW



MATRIX  
LIME



MATRIX  
HONEY



MATRIX  
VANILLA



MATRIX  
ARMY GREEN



MATRIX  
STRAWBERRY



MATRIX  
GREY

# Index



Tap To  
Explore  
360 view


Tap On Particular Product To  
Explore Full Size View.



Tap To  
Back To  
Index Page

Again Tap On The Tiles Page  
To Return To Index Page

## DOUBLE CHARGE



MATRIX  
BLACKBERRY



MATRIX  
GRANITE



MATRIX  
BLACK




MATRIX  
GALAXY

# POLO WHITE

600 X 600MM

POLO SERIES

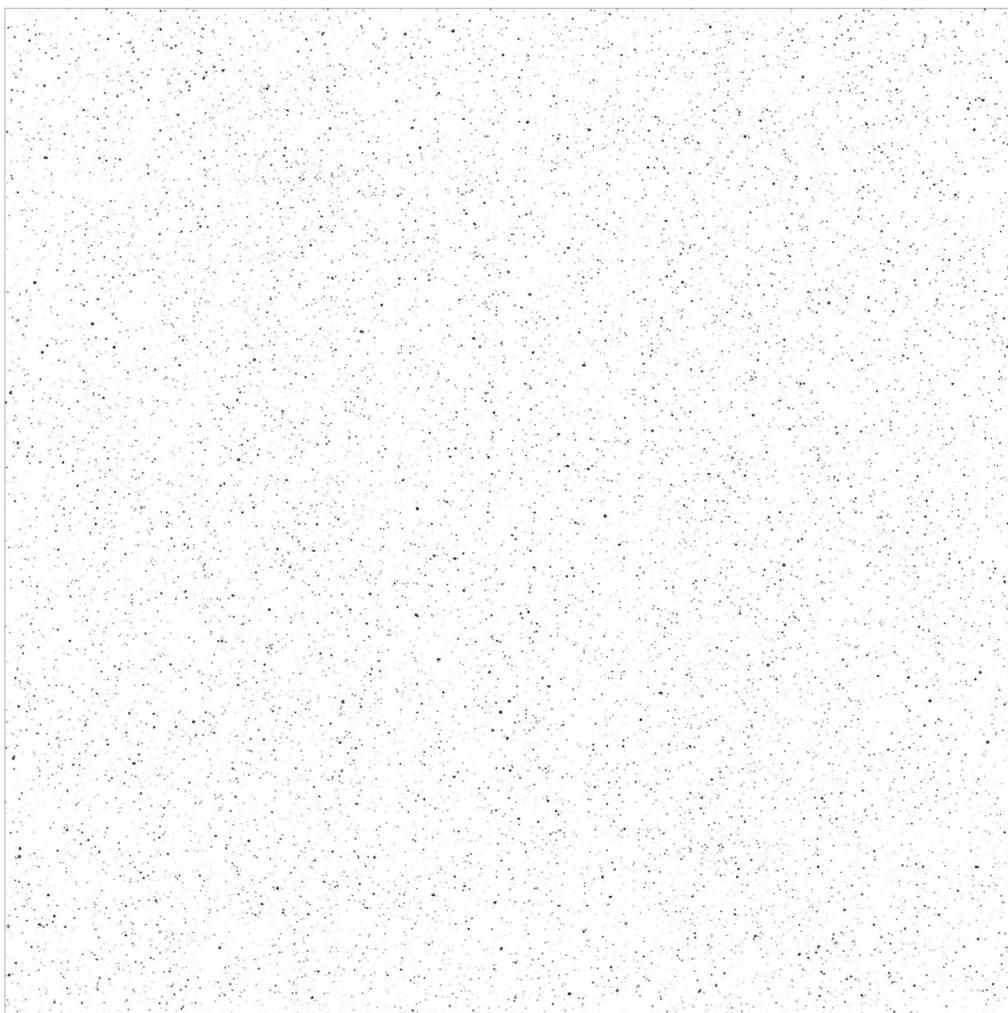

SCAN OR  
TOUCHFOR  




# POLO CREMA

600 X 600MM

POLO SERIES




SCAN OR  
TOUCHFOR  





# POLO THAR

600 X 600MM

POLO SERIES

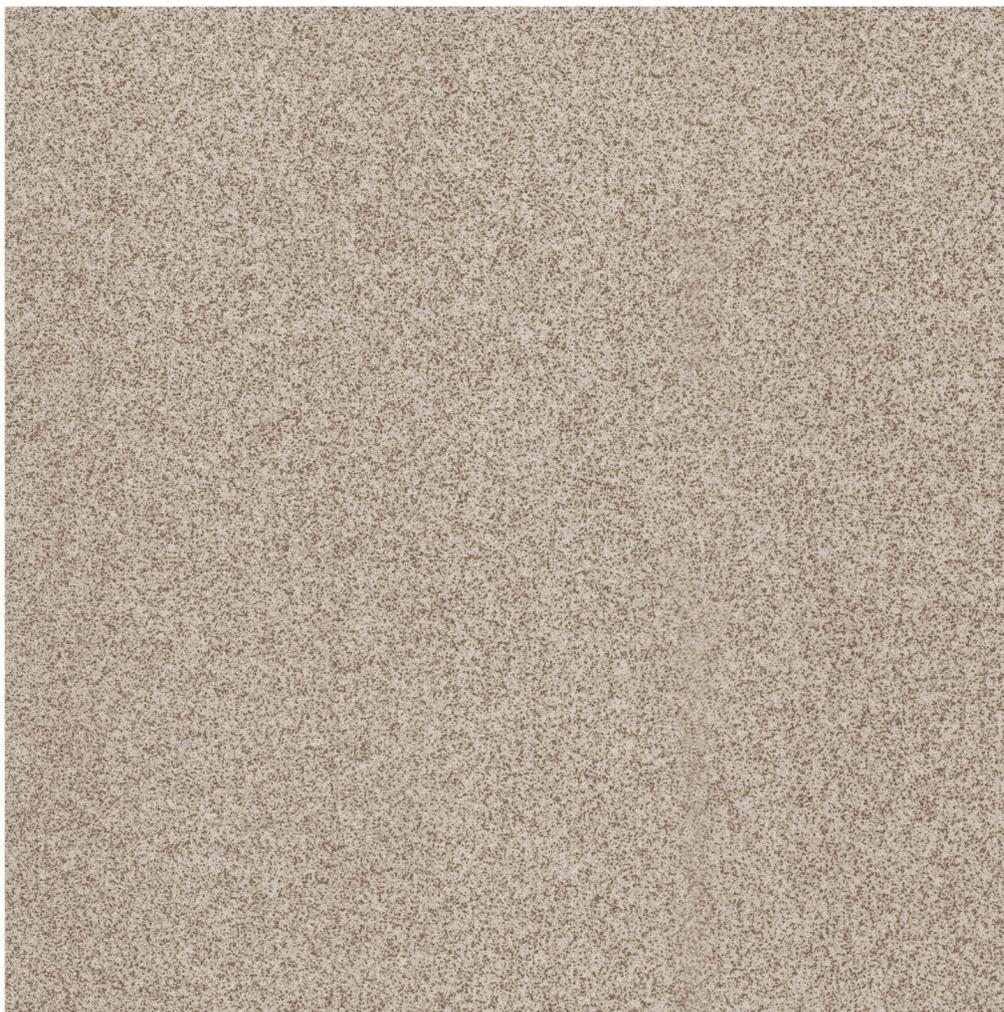

SCAN OR  
TOUCHFOR  
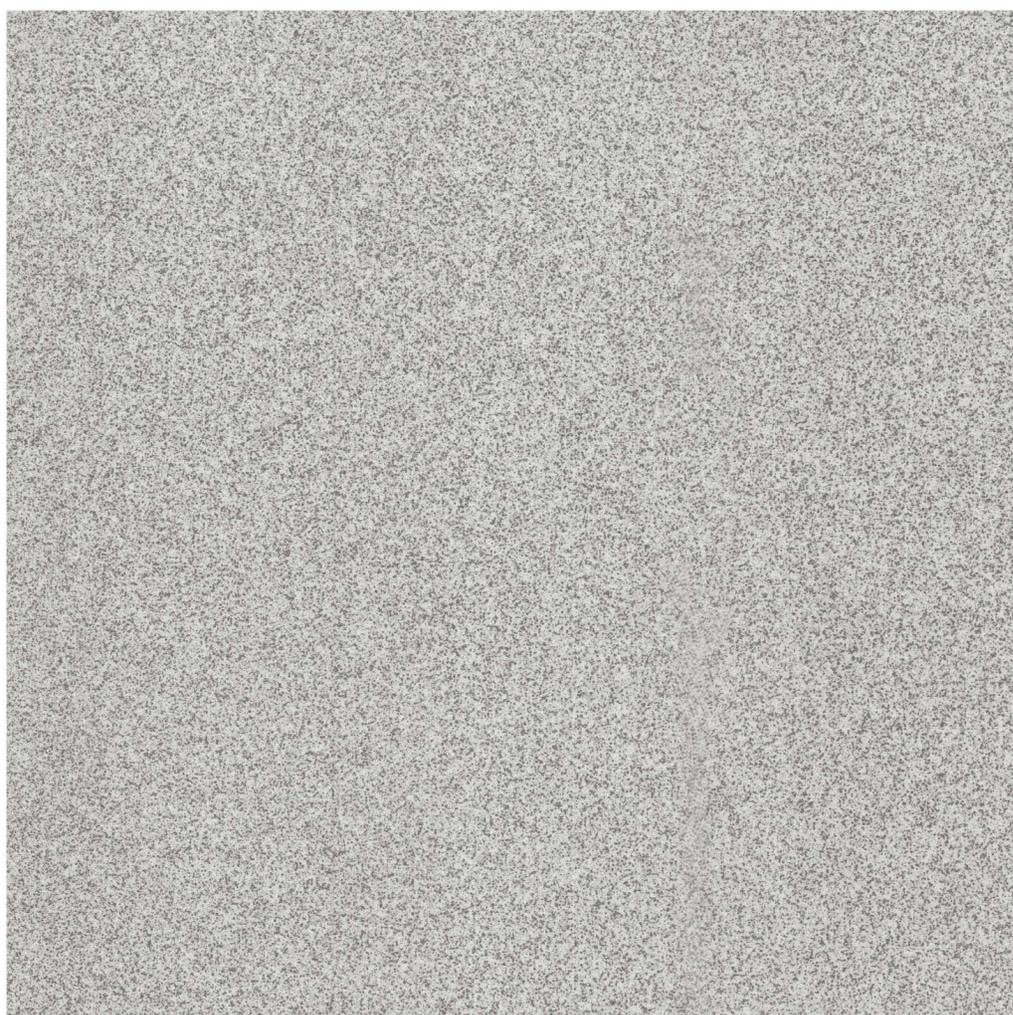
# POLO SMOKE

600 X 600MM

POLO SERIES



SCAN OR  
TOUCHFOR  





# SUPER WHITE

600 X 600MM

SUPER SERIES



SCAN OR  
TOUCHFOR  

# ORIO WHITE

600 X 600MM

ORIO SERIES



SCAN OR  
TOUCHFOR  




# ORIO GREY

600 X 600MM

ORIO SERIES



SCAN OR  
TOUCHFOR  





## MATRIX WHITE

600 X 600MM

800 X 800MM

LIGHT SERIES

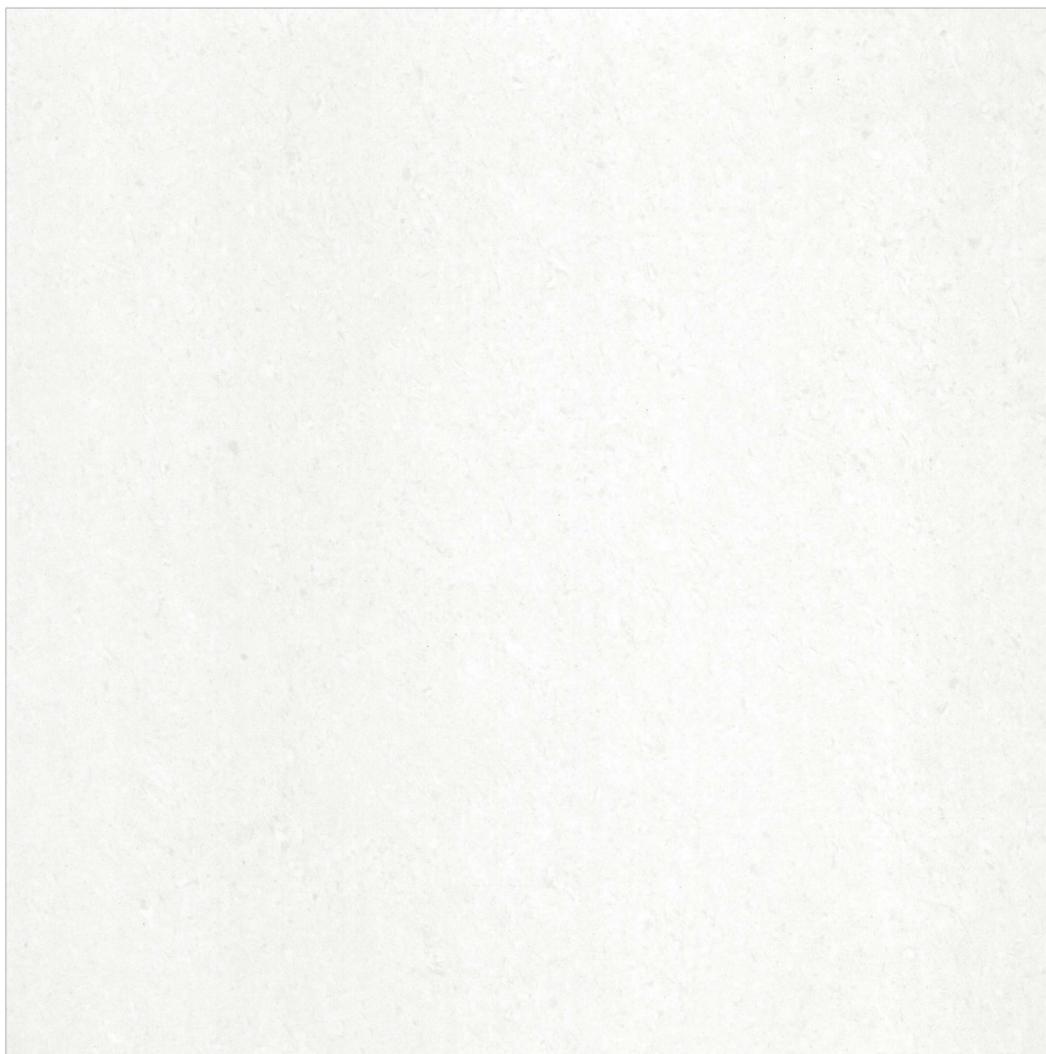

SCAN OR  
TOUCHFOR



## MATRIX GOLD

600 X 600MM

800 X 800MM

LIGHT SERIES



SCAN OR  
TOUCHFOR






## MATRIX PINK

600 X 600MM

LIGHT SERIES

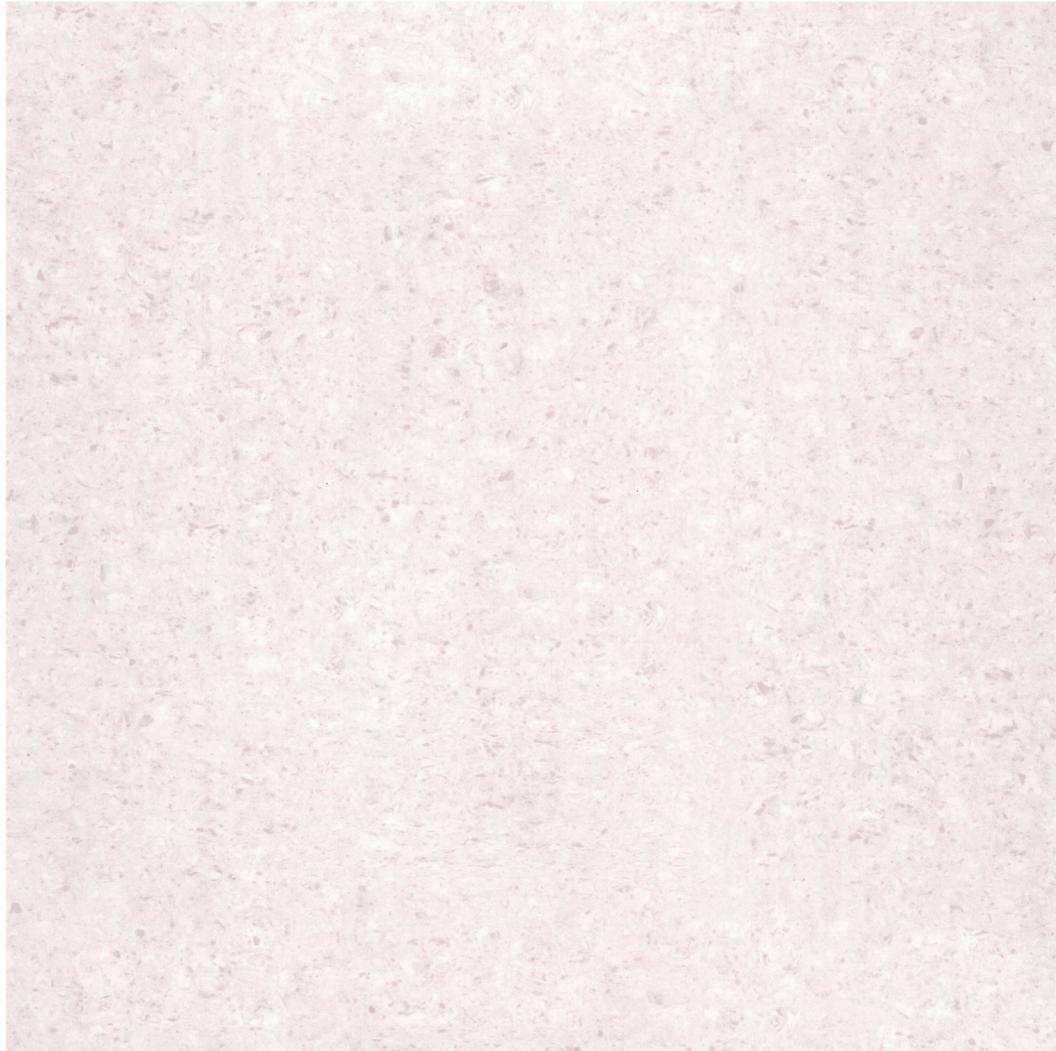

SCAN OR  
TOUCHFOR  
360°



## MATRIX PISTA

600 X 600MM

LIGHT SERIES



SCAN OR  
TOUCHFOR  
360°



## MATRIX CORE

600 X 600MM

LIGHT SERIES




SCAN OR  
TOUCHFOR  


## MATRIX DOVE

600 X 600MM

LIGHT SERIES

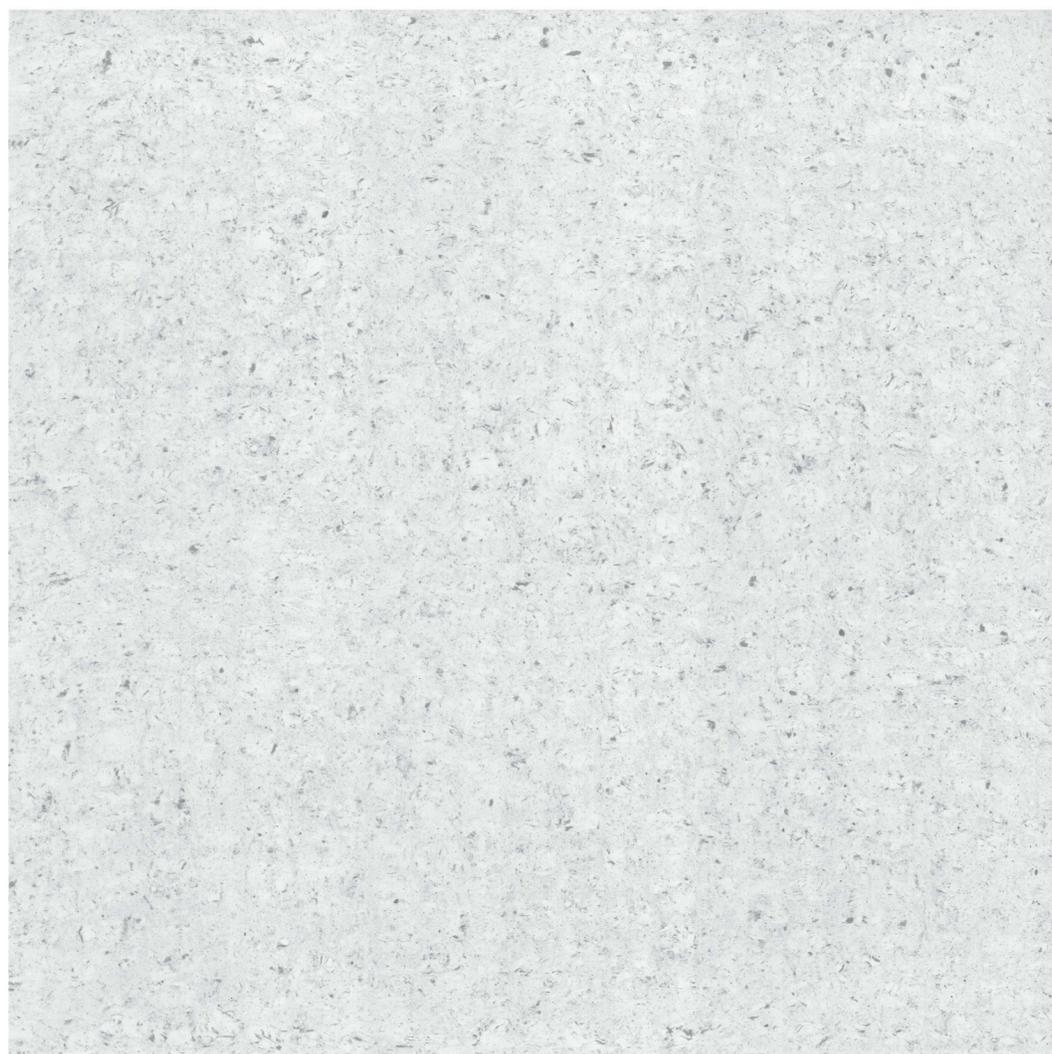

SCAN OR  
TOUCHFOR  





## MATRIX YELLOW

600 X 600MM

LIGHT SERIES



SCAN OR  
TOUCHFOR  
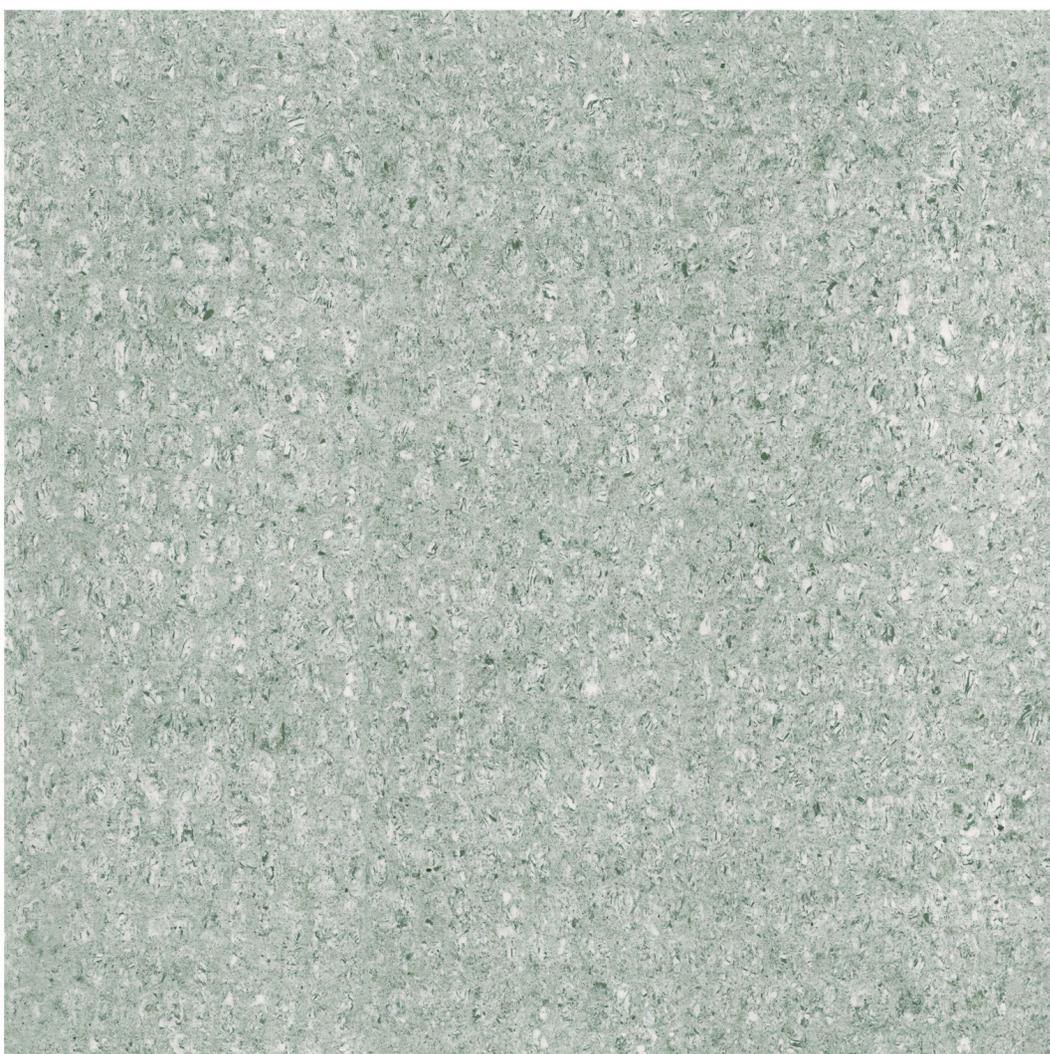
## MATRIX LIME

600 X 600MM

LIGHT SERIES



SCAN OR  
TOUCHFOR  




## MATRIX HONEY

600 X 600MM

LIGHT SERIES



SCAN OR  
TOUCHFOR  




## MATRIX VANILLA

600 X 600MM

LIGHT SERIES




SCAN OR  
TOUCHFOR  




## MATRIX ARMYGREEN

600 X 600MM

LIGHT SERIES

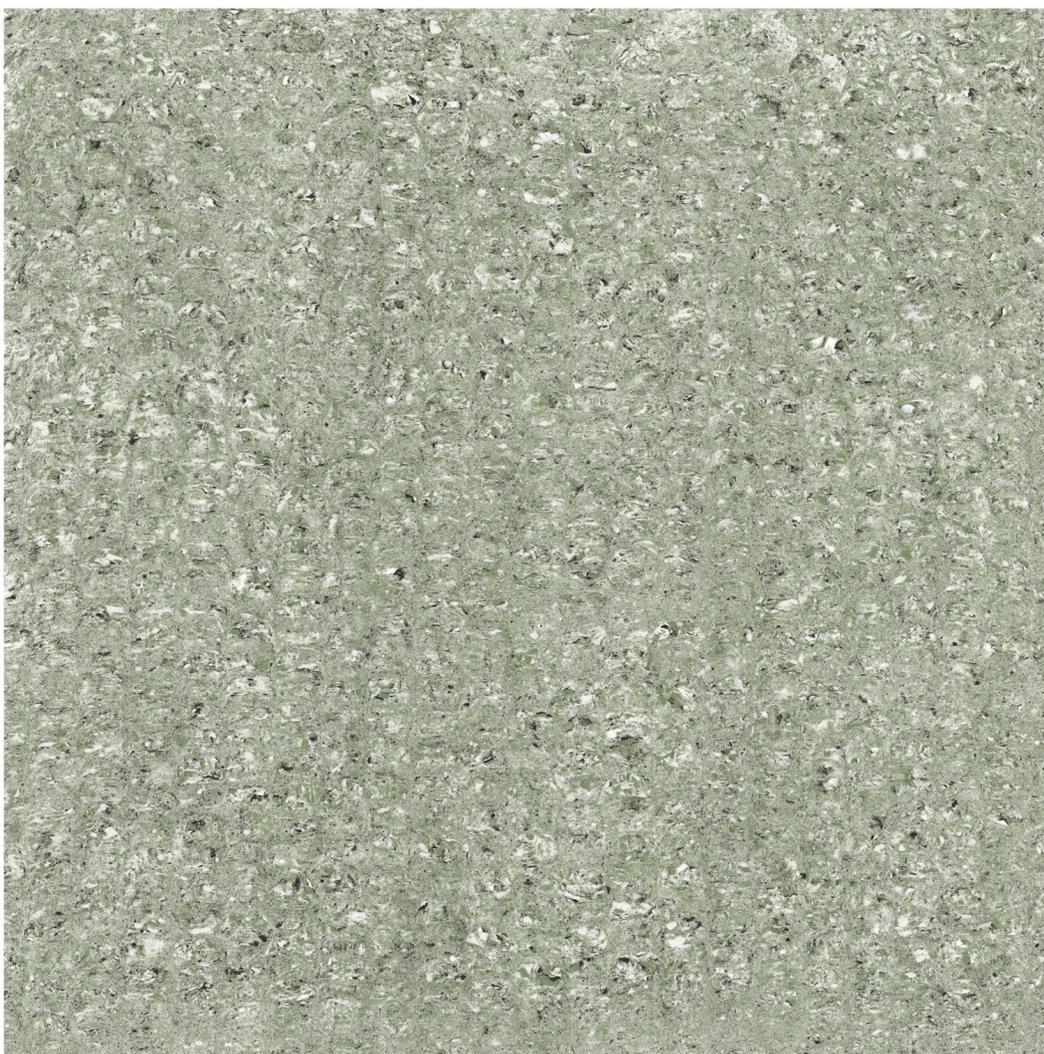

SCAN OR  
TOUCHFOR  




## MATRIX STRAWBERRY

600 X 600MM

LIGHT SERIES




SCAN OR  
TOUCHFOR  





## MATRIX GREY

600 X 600MM

LIGHT SERIES

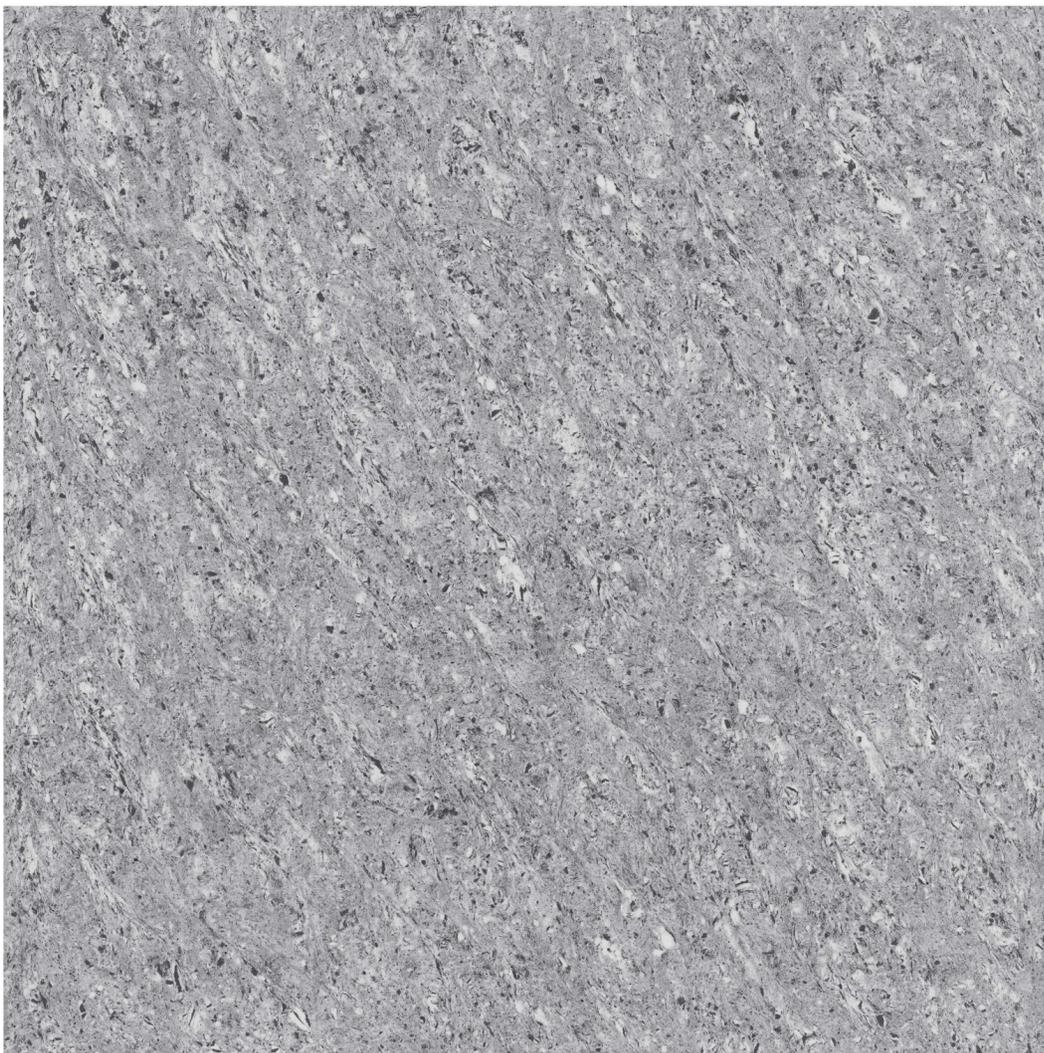

SCAN OR  
TOUCHFOR  
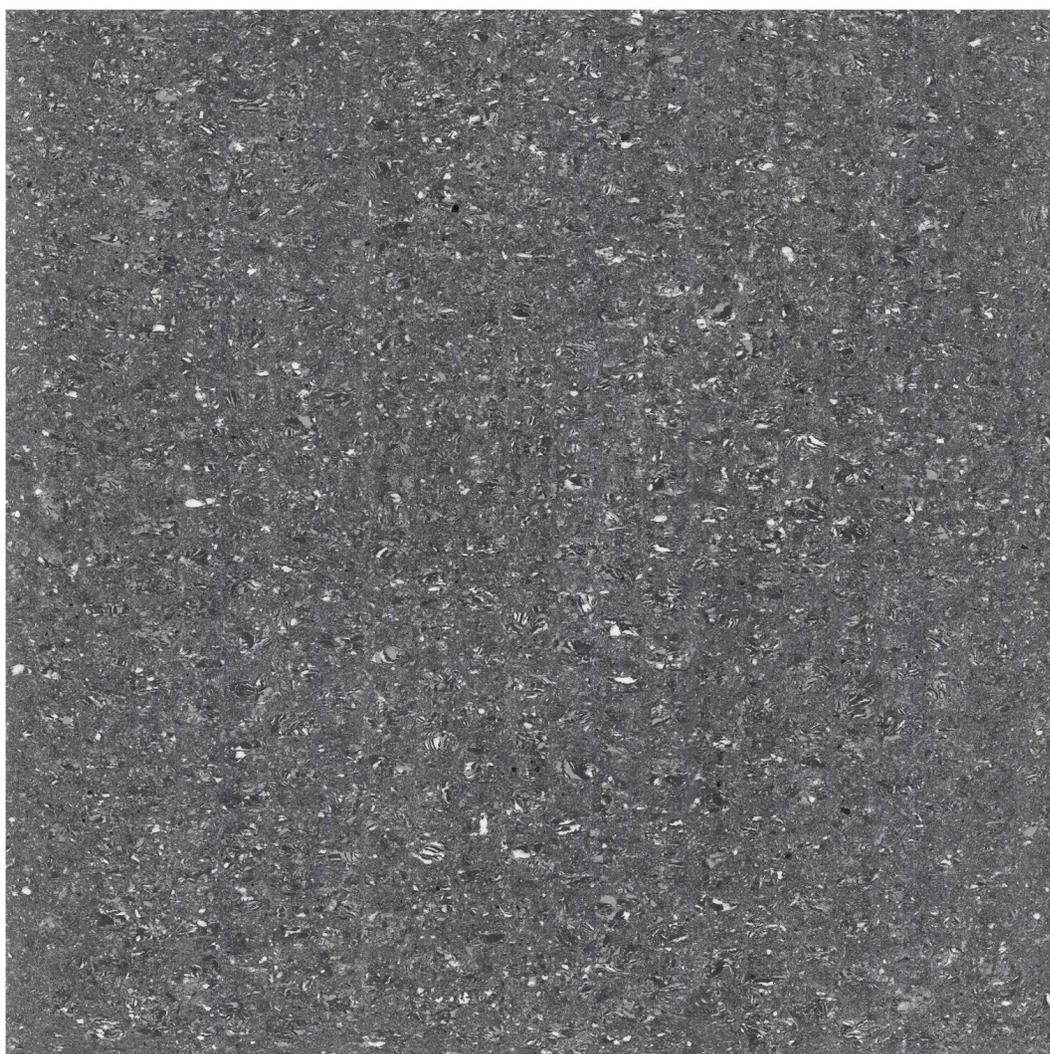
## MATRIX BLACKBERRY

600 X 600MM

LIGHT SERIES



SCAN OR  
TOUCHFOR  




## MATRIX GRANITE

600 X 600MM

DARK SERIES



SCAN OR  
TOUCHFOR  




## MATRIX BLACK

600 X 600MM

DARK SERIES



SCAN OR  
TOUCHFOR  




# MATRIX GALAXY

600 X 600MM

DARK SERIES




SCAN OR  
TOUCHFOR



## TILES INSTALLATION GUIDE

Vitrified tiles, manufactured using latest Italian Technology machinery are with best quality sands, which are purified by removing all impurities, So use proper and perfect way of installation to avoid bending, shade variation and sizing problems.

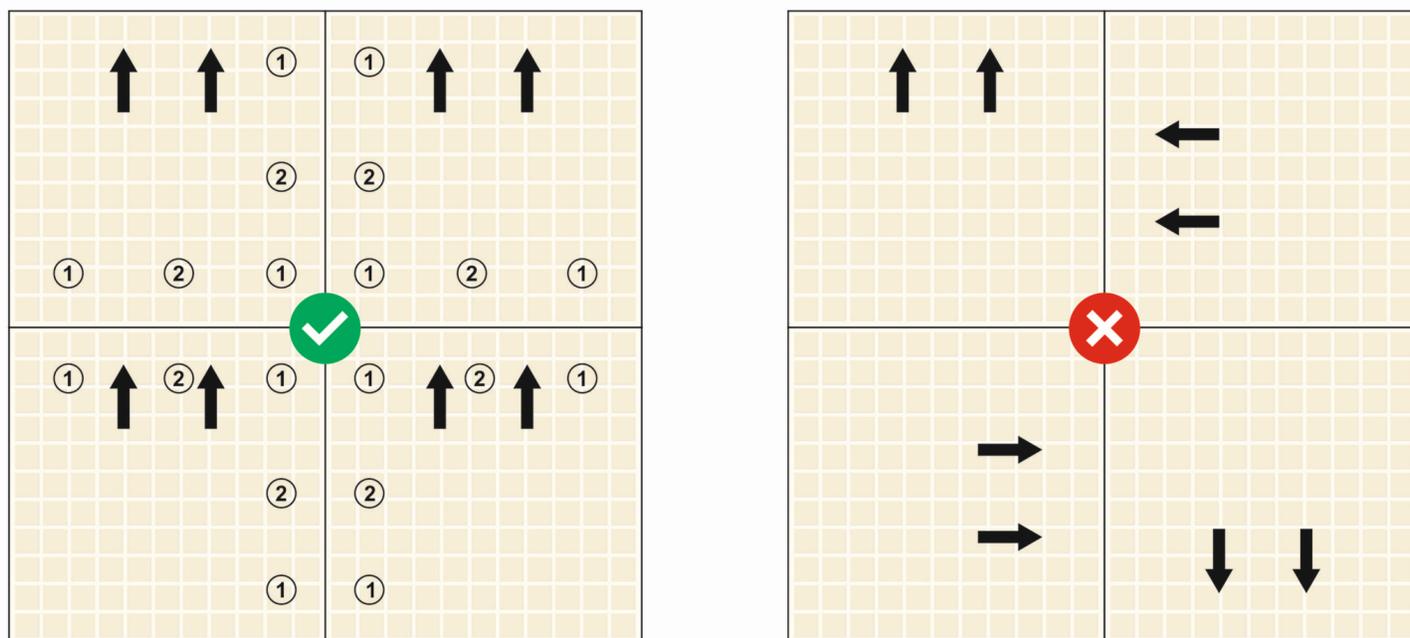

- Place all the arrows in same direction
- Maintain perfect level at point (1) and (2) as shown in picture
- Bending up to 0.5mm is valid in ceramic industry as mentioned in catalogue. (Zero Bending is not possible)

Note: Please install tiles as illustrated Company is not responsible after installation.

## TECHNICAL SPECIFICATION

Sr. No.	Characteristics	International Std. ISO 13006/EN 176 Group Bla	VITRIFIED TILES	Method of Testing
01	Deviation in length & width	± 0.6%	± 0.1%	EN 98
02	Deviation in thickness	± 5.0%	± 5.0%	EN 98
03	Straightness in sides	± 0.5%	± 0.1%	EN 98
04	Rectangularity	± 0.6%	± 0.2%	EN 98
05	Surface flatness	± 0.5%	± 0.2%	EN 98
06	Water absorption*	< 0.5%	< 0.05 %	EN 99
07	Moh's hardness*	> 6	> 8	EN 101
08	Flexural straightness*	> 27 N/mm <sup>2</sup>	> 47 N/mm <sup>2</sup>	EN 100
09	Abrasion resistance	< 204 mm <sup>3</sup>	< 144 mm <sup>3</sup>	EN 102
10	Skid resistance (Friction coefficient )	> 0.4	> 0.6	ASTM C-1028
11	Breaking Strength*	1113 N	2830 N	ASTM C-648
12	Density ( g/cc)	> 2	2.4	DIN 51082
13	Frost resistance	Frost proof	Frost proof	EN 202
14	Chemical resistance	No damage	No damage	EN 106
15	Thermal shock resistance	No damage	No damage	EN 104
16	Colour resistance	No damage	No damage	DIN 51094
17	Thermal Expansion (COE)	< 9.0x10 <sup>-6</sup>	< 6.5x10 <sup>-6</sup>	EN 103
18	Satin resistance	Resistance	Resistance	ISO-10545-14
19	Moisture expansion	Nil	Nil	ISO-10545-10
20	Glossiness	-	Min. 65%-70% reflection	Glossometer

## PACKAGING DETAILS

Size	No. of Tiles/Box	Coverage Area
600x600mm	4 Pcs.	1.44 Sq.mt.
800x800mm	3 Pcs.	1.92 Sq.mt.

DISCLAIMER: We reserves the right to delete & amend either totally of partially, any of the colours, shapes, sizes, references and other technical specifications contained in this catalogue at any time. The colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of colours, sizes, references should be verified for Typographical errors SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINT SHALL BE ENTERTAINED ON TILES ALREADY LAID/FIXED.

THANK  
YOU